


STATIC FIRE DAMPER

Submittal Drawing 0130 Static Fire Damper


TYPE C STANDARD CONSTRUCTION

FRAME	FINISH	FUSIBLE LINK	BLADES
22 ga. Rollformed Steel Frame	Mill	165 deg. F Standard	22 ga. Interlocking Steel Blades 'Out of the Light Stream'

Horizontal & Vertical U.L. Classified 1 - 1/2 Hour Rating

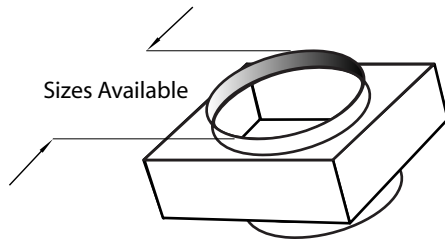

HORIZONTAL MOUNT
Horizontal Mounting Model Includes
Stainless Steel Negator Spring & Blade Locks



SIZES AVAILABLE

- 8.5 inch 85 - 850
- 13 inch 13 - 850
- 17 inch 17 - 850
- 21 inch 21 - 850

OPTIONS

- 212 deg F. Fusible Link
- 855 Stainless Steel Construction



*Prior to construction, check with all local building authorities and check building codes for compliance.

